

Kestrel® 4000 Pocket Weather™ Tracker™

Instruction Manual

Kestrel® 4000 Pocket Weather™ Tracker™

FRONT

MANUAL MEMORY BUTTON
Press to manually store current conditions to memory.


MEASUREMENT BUTTONS
Press to scroll between screens: Date/Time, Measurements, User Defined Screens

POWER/SETUP BUTTON
Hold to turn power on or off. Press to enter and exit Main Setup Menu.

BACKLIGHT BUTTON
Press to activate backlight for 1 minute.

MODE BUTTONS
Press to change mode of measurements: Current, Min/Max/Avg, Chart.

COMMAND BUTTON
In Chart Screens, press to view data points.
In Setup Menus, press to make selection.

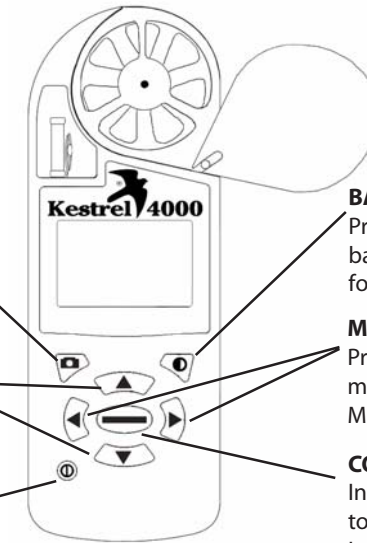

2

Kestrel® 4000 Pocket Weather™ Tracker™

BACK

IMPELLER
Sapphire jewel bearings on a user-replaceable impeller.

IMPELLER COVER
Swivel cover protects impeller when not in use.

DATA UPLOAD OPTICAL COUPLER
Software and serial port interface sold separately.

BATTERY DOOR
Sealed with o-ring to keep product watertight.


TEMPERATURE SENSOR
Hermetically sealed precision thermistor.

HUMIDITY SENSOR
Capacitive sensor.

SERIAL NUMBER

PRESSURE SENSOR
Monolithic silicon piezoresistive sensor.

2 AAA BATTERIES

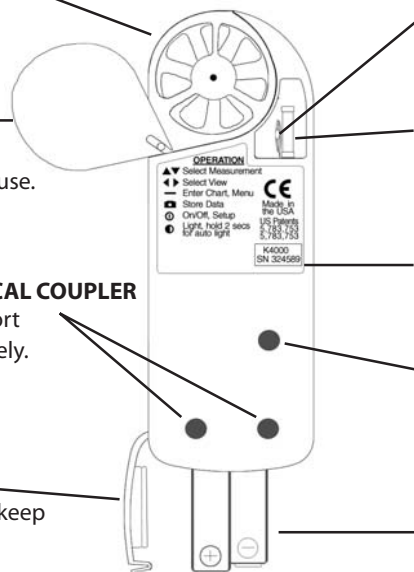

Congratulations on the purchase of your Kestrel 4000 Pocket Weather Tracker! The Kestrel 4000 is the next generation of weather monitoring. Now, you can instantly measure EVERY major environmental condition easily, accurately, and right in the palm of your hand.

While the Kestrel 4000 is user-friendly and simple to use (and the Quick Start Card will help get you started), reading the instruction manual is recommended in order to use the Kestrel 4000 to its fullest potential.

NK, manufacturer of Kestrel Pocket Weather Meters, is available to answer questions and provide support. Contact NK by phone: 610.447.1555, fax: 610.447.1577, email: info@nkhome.com, or web: www.nkhome.com.

Table of Contents

Getting Started	
Pouch and Lanyards	5
Battery Installation	5
On/Off	5
Date and Time Set Up	5
Screen Navigation	
Measurements and Modes	6-7
Charts	7
Special Functions	
User Screens	8
Wind Speed/Chill Averaging	8
Accurate Humidity Readings	8
Barometer/Altimeter Adjustments	8
Manual Data Storage	9
Backlight	9
Main Setup Menu	10-12
Application Examples	13-14
Memory Capabilities	14
Glossary	15-16
Factory Default Settings	17
Specifications	18


3

4

Getting Started

Pouch and Lanyards

Wrist and neck lanyards and a small pouch have been provided. To install the lanyard, feed the thin end of the lanyard around the metal post on the battery door (as shown in diagram). Feed the thick end of the lanyard through the loop on the thin end. Using tweezers can help.



Battery Installation

Use only AAA batteries. Install batteries as indicated on the battery door. After installing the batteries, the Kestrel 4000 will automatically start in the Date and Time Setting mode. (See Date and Time Setup below.) Custom settings and chart data will be saved during a battery change.


Turning the Kestrel 4000 ON and OFF

ON: Press the **⏻** button.

OFF: Hold the **⏻** button for two seconds. Or, press the **⏻** button, then press the **⏏** button with the word OFF highlighted. (Note: your unit will continue to automatically store data when the power is turned off.)

Date and Time Setup

The first time that you turn on your Kestrel 4000, as well as after a battery change, you will need to set the date and time. The Introduction Screen will appear for 3 seconds, followed by the Date/Time Setup Screen. Press the **▲** and **▼** buttons to scroll through the settings. Press the **◀** and **▶** buttons to scroll through the setting options. After entering the date and time, press the **⏻** button to exit the Date/Time Setup. Then press the **⏻** button again to exit the Main Setup Menu.



5

Measurement Navigation

Starting on the Date & Time Screen...



...Press the **▼** button to scroll to the Current Wind Speed Screen.

Press the **▼** button again to scroll to the Current Temperature Screen.

Continue pressing the **▼** button to scroll through the Current Measurement Screens, listed on the previous page, followed by the 3 User Screens. Press the **▲** button to scroll through these screens in reverse order.

Navigation of Charts

The Kestrel 4000 is capable of storing up to 250 data points. To review the data, press the **⏏** button while viewing a chart. A cursor will appear on the most recent data point. Press the **◀** button to scroll through older data points and the **▶** button to scroll through more recent data points. The date and time at which the data was stored will be displayed at the bottom of the screen. The data value will be displayed at the top of the screen. Hold down the **◀** or **▶** button to scroll quickly through the data points.



Press the **▲** or **▼** button to review the data for the other measurements. Please note that the cursor will remain at the same date and time. If new data is stored while viewing chart data, the entire chart will shift left with the new data point charted on the right. The cursor will not shift with the chart.

Press the **⏏** button to return to the Chart Mode.

7

Navigation

The Kestrel 4000 is set up to display 10 Measurements (some are actually calculations) in 3 Modes.

The Measurements are listed to the right with their corresponding screen icon. Use the **▲** and **▼** buttons to scroll through the various Measurements.


The Modes are:

Current - displays the instantaneous reading

Min/Max/Avg - displays the Minimum/Maximum/Average readings from stored data

Chart - displays a graphical representation of up to 250 stored data points

Examples of each of these screens are shown below. Use the **◀** and **▶** buttons to scroll through the various Modes.

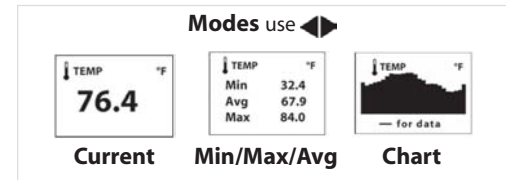

In addition to these Measurements and Modes, there are also 3 User Screens, which simultaneously show 3 current measurements (see pages 8 and 11 for more information); and the Date & Time Screen, which gives the current date and time.

6

Measurements


use ▲▼

- Wind Speed
- Temperature
- Wind Chill
- Humidity
- Heat Index
- Dew Point
- Wet Bulb
- Barometric Pressure
- Altitude
- Density Altitude

Special Functions

User Screens

The Kestrel 4000 has three User Screens which can be customized to display three current measurements simultaneously. (See page 11 for setup instructions.)



Min/Max/Avg for Wind Speed and Wind Chill

The Min/Max/Avg values for Wind Speed and Wind Chill are measured independently from the stored and charted data. While viewing the Min/Max/Avg screen for either Wind Speed or Wind Chill, press the **⏏** button when the screen displays "--average" to begin collecting data for both measurements. Press the **⏏** button when the screen displays "--stop" to stop collecting data and hold the values on the display. Press the **⏏** button when the screen displays "--clear" to clear the data. This routine will work simultaneously for both measurements, regardless of which one is displayed while the routine is run. The Min/Max/Avg for Wind Speed and Wind Chill will not affect any other Min/Max/Avg or stored data.

Relative Humidity

For accurate measurements, keep the Kestrel 4000 in the shade. Allow the unit to sit in ambient conditions for several minutes or wave the meter side-to-side for 15 seconds.

Barometric Pressure and Altitude Adjustment

The Kestrel 4000 will measure station pressure in order to calculate barometric pressure and altitude. Changes in either air pressure or altitude will affect these readings, so it's important to make adjustments as necessary.

First, you will need to obtain either (a) the current barometric pressure or (b) the altitude of your location. You can obtain your current barometric pressure by contacting a local airport or weather service. Set this value as your reference pressure on the ALTITUDE screen to determine your altitude. Otherwise, you can obtain your altitude from a topographical map or local landmark. Set this value as your reference altitude on the BARO screen to determine your barometric pressure.

There are two basic examples for when and how to use the BARO and ALTITUDE screens. First, assume that you know the altitude from one of the sources above. Set the reference altitude on the BARO screen to this elevation. As long as you remain at home, you can accurately track changes in the barometric pressure. However, the measurement on the ALTITUDE screen also changes. This value will fluctuate as pressure fronts pass through your location. Since you know your house is not changing elevation, you can ignore this screen.


8

Now let's assume that you are planning a day hike, and you'd like to track your altitude. Before starting, you'll need to adjust the reference pressure on the ALTITUDE screen. You can do this by simply adjusting the reference pressure until you reach the elevation of your house. The reference pressure will be the same as the pressure reading on the BARO screen. You can now track the altitude changes as you hike. You can ignore the values on the BARO screen, since the pressure changes are predominantly due to changes in elevation.

As with all altimeters, it must be assumed that any change in pressure due to weather is small over the course of one day. If you were to encounter an elevation landmark, you can adjust the reference pressure until the altitude matches the landmark elevation. This will correct the altitude for any pressure changes due to the weather.

Altitude Adjustment

Obtain a barometric pressure reading from a local weather source to use as your reference pressure. From the Current Altitude Screen, press the **■** button to enter the adjustment mode. Press the **▶** button to increase the reference pressure or the **◀** button to decrease the reference pressure. You will notice that the Altitude will change with changes in the reference pressure. Press the **■** button to exit the adjustment mode.



Pressure Adjustment

Obtain your altitude from a topographical map or landmark to use as your reference altitude. From the Current Barometric Pressure Screen, press the **■** button to enter the adjustment mode. Press the **▶** button to increase the reference altitude or the **◀** button to decrease the reference altitude. You will notice that the Barometric Pressure will change with changes in the reference altitude. Press the **■** button to exit the adjustment mode.



Manual Data Storage

To manually store data, press the **■** button. One of the following will appear: Data Stored (data has been captured and will appear on chart), Full (Overwrite is off and data log is full), or Off (Manual Store button has been disabled). See page 10 for more information on Memory.

Backlight

Press the **ⓘ** button to activate the backlight. The light will remain activated for one minute. Press the **ⓘ** button within one minute to deactivate the light manually.

Measurements - Measurement screens can be hidden from the normal measurement navigation. For example, if wind chill is not of interest, it can be hidden. Press the **◀** or **▶** button to toggle between ON and OFF for each individual measurement. Press the **▲** or **▼** button to highlight the desired measurement. Press the **ⓘ** button to return to the Main Setup Menu.

Graph Scale - These settings control the chart limits of your meter. Depending on the conditions, the lower and upper limits of the chart scale may need to be adjusted in order to get the best view of the data. Highlight the desired measurement by pressing the **▲** or **▼** button. Select the highlighted measurement by pressing the **■** button. Press the **◀** or **▶** button to increase or decrease the value of the limits. Press the **▲** or **▼** button to change between the upper and lower limits. Press the **ⓘ** button to exit and return to the measurement selection screen. Press the **ⓘ** button to return to the Main Setup Menu.

Units - The units of measure can be adjusted to best suit the application. The following units are available:

Wind Speed	Temperature, Dewpoint, Wet Bulb Temp, Wind Chill & Heat Index	Pressure	Altitude, Density Alt.
m/s meters per second	°C Celsius	inHg inches mercury	m meters
km/h kilometers per hour	°F Fahrenheit	hPa hectopascals	ft feet
kt knots		psi pound per square inch	
mph miles per hour		mb millibar	
ft/m feet per minute			
Bft Beaufort			

Highlight the desired measurement by pressing the **▲** or **▼** button. Press the **◀** or **▶** button to scroll through the available units. Press the **ⓘ** button to return to the Main Setup Menu.

User Screens - The three User Screens can be reconfigured to display the most appropriate information for the application. Only current measurements can be selected for the User Screens - Min/Max/Avg and Charts are not available.

Highlight the desired User Screen by pressing the **▲** or **▼** button. Press the **■** button to select the highlighted User Screen. Press the **▲** and **▼** buttons to change lines, and the **◀** or **▶** button to scroll through the available measurements for each highlighted line. Press the **ⓘ** button to return to the User Screen Setup Menu. Repeat above process for the other User Screens or press the **ⓘ** button to return to the Main Setup Menu.

Main Setup Menu

You can customize your Kestrel 4000 in multiple ways. Press the **ⓘ** button to access the Main Setup Menu. Press the **■** button to select the highlighted setting.

Off - Press the **ⓘ** or the **■** button to turn the display off. Even when the Kestrel's display is turned off, the unit will continue to automatically store data at the defined Store Rate. Wind speed will NOT be stored when the unit is off. To continuously measure wind speed, turn the auto shutdown off (pg. 12). The battery life will be decreased if data is stored frequently. The only way to completely shut off the unit is to remove the batteries. Custom settings and data will be stored when the batteries are removed.

Memory Options - These settings control the data storage properties. Press the **ⓘ** button to return to the Main Setup Menu.

Setting	Description	Operation
Clear Log (Go/Done)	All stored data is cleared. This will also clear Min/Max/Avg data.	Press ◀ or ▶ to clear the log.
Reset MMA (Go/Done)	All Min/Max/Avg data is cleared. Chart data will remain intact.	Press ◀ or ▶ to clear the MMA.
Auto Store (On/Off)	When On, data is automatically stored at preset Store Rate. When Off, data is only stored when manually captured with the ■ button.	Press ◀ or ▶ to toggle between On and Off.
Store Rate* (2 sec - 12 hr)	The frequency at which data sets are automatically stored. (Battery life may be shortened if data is stored frequently.)	Press ◀ or ▶ to increase or decrease Store Rate frequency.
Overwrite (On/Off)	This setting only applies when the data log is full. When On, oldest data point is discarded to allow memory for the new data point. When Off, new data points are not saved.	Press ◀ or ▶ to toggle between On and Off.
Man Store (On/Off)	When On, data is stored when the ■ button is pressed. When off, the ■ button is disabled.	Press ◀ or ▶ to toggle between On and Off.

* When unit is off, data is NOT stored for 2 sec and 5 sec Store Rates.

System - The display Contrast and Auto Shutdown can be reconfigured as required. The relative humidity and pressure sensors can also be recalibrated. Press the **▲** and **▼** buttons to highlight the appropriate selection, and the **◀** or **▶** button to adjust or select.

The Contrast can be adjusted for better visibility depending on the ambient lighting conditions. Press the **◀** or **▶** button to increase or decrease the contrast from 0 to 20 (0 is lightest, 20 is darkest).

The display can be set to automatically turn off in order to conserve the battery life. Auto Shutdown will only occur after the preset time has elapsed without any button presses. Press the **◀** or **▶** button to scroll through the Auto Shutdown options (15 minutes, 60 minutes, Off).

Baro Cal - The pressure sensor can be calibrated if necessary. It is extremely important to know the precise altitude and mean seal level barometric pressure at the time of calibrating the sensor. First, set the reference altitude on the BARO measurement screen to the known altitude (see Pressure Adjustment on page 9). Then adjust the calibrating setting on the Baro Cal screen to the known mean seal level barometric pressure. Recalibration of this sensor is not typically required, and it is not recommended that you recalibrate without speaking to an NK technician.

Humidity Cal - The humidity sensor can be calibrated by "teaching" it the correct humidity. Some special equipment is required for this calibration, including two hermetically sealed containers and saturated salt solutions. NK offers a calibration kit, and instructions are available on www.nkhome.com. Recalibration of this sensor is not typically required, and it is not recommended that you recalibrate without speaking to an NK technician.

Press the **ⓘ** button to return to the Main Setup Menu.

Date & Time - The date and time, as well as date and time formats, can be adjusted. The Time Formats available are: 12 hour and 24 hour. The Date formats available are day/month/year and month/day/year. (See page 5 for instructions on how to set the date and time.) Press the **ⓘ** button to return to the Main Setup Menu.

Language - Displayed text can be set in one of five languages: English, French, German, Italian or Spanish. To choose a language, use the **▲** and **▼** buttons to highlight the desired language. Press the **■** button to select the language and return to the Main Setup Menu. Otherwise, press the **ⓘ** button to return to the Main Setup Menu without changing languages.

Restore - Default settings for units of measure, date and time formats, and system settings can be restored. (See page 17 for a list of the default settings.) Press the **▲** or **▼** button to highlight the desired default setting: Metric, Imperial or Defaults. Press the **◀** or **▶** button to reset the factory setting. Press the **ⓘ** to return to the Main Setup Menu.

Application Examples

This section provides examples of applications where a Kestrel 4000 might be used, and the appropriate memory settings.

Weather Monitoring

Auto Store On
Store Rate 1 hr
Overwrite On
Man Store Off

These settings will allow you to track conditions for almost 10 1/2 days. When the memory is full, each new measurement will be stored in place of the oldest data point. The charts will provide a quick look at the recent weather conditions. Keep an eye out for falling barometric pressure, which indicates a storm is coming.

Hiking/Camping for the Weekend

Auto Store On
Store Rate 20 min
Overwrite Off
Man Store On

These settings will allow you to track the conditions for almost 3 1/2 days. Measurements will be stored every 20 minutes, and stop storing when the log is full. This will let you review the trip at your convenience when you return. You can also manually store the conditions, in case you get caught in 40 mile per hour winds or make it to the top of a mountain. For more detailed information on your trip, set the Store Rate to 2 hours overnight, and 10 minutes during the day.

Soaring/Hang Gliding

Auto Store On
Store Rate 2 min
Overwrite Off
Man Store On

These settings will allow you to track all conditions for over 8 hours. Chart your altitude changes, watch how the temperature and humidity vary with altitude, and log your apparent speed. Data will no longer be stored once the log is full, in order to preserve it until it can be reviewed later. Be sure to clear the data log just before your flight.

Skydiving

Auto Store On
Store Rate 2 sec
Overwrite Off
Man Store Off

These settings will allow you to record a detailed account of your jump. Be sure to clear the data log just before jumping. As you descend toward the ground, you will be tracking the altitude every two seconds, as well as the conditions at that altitude. The chart will clearly show the point at which the parachute opens, as well as the point you get back on the ground.

13

Glossary

The below definitions have been greatly simplified in order to keep this section brief. We strongly recommend that anyone who wishes to make use of these measurements refer to one of the many excellent weather references available for a more in-depth definition. On the internet, visit www.usatoday.com or www.noaa.gov. Or, locate the USA Today publication, *The Weather Book*. Please note that any words in a definition printed in *italics* are themselves defined in this glossary.

Altitude: The distance above sea level. The Kestrel 4000 calculates altitude based on the measured *station pressure* and an assumed or known *barometric pressure*.

Barometric Pressure: The air pressure of your location reduced to sea level. Pressure will change as weather systems move into your location. Falling pressure indicates the arrival of a low pressure system and expected precipitation or storm conditions. Steady or rising pressure indicates clear weather.

Density Altitude: The *altitude* at which you would be, given the current air density. Often used by pilots in order to determine how an aircraft will perform. Also of interest to individuals who tune high performance internal combustion engines, such as race care engines.

Dewpoint: The *temperature* to which air must be cooled in order for condensation to occur. The difference between *dewpoint* and *temperature* is referred to as the "temperature/dew point spread". A low dewpoint spread indicates high *relative humidity*, while a large dewpoint spread indicates dry conditions.

15

HVAC - Environmental Monitoring

Auto Store On
Store Rate 5min
Overwrite On
Man Store Off

These settings will record conditions every five minutes, for a total storage of almost 21 hours. You can monitor the conditions in a laboratory or manufacturing plant, both day and night, to determine if the climate control is working properly. Or you can examine the effect on the environment when employees enter and exit the building.

HVAC/R - System Balancing

Auto Store Off
Store Rate —
Overwrite Off
Man Store On

These settings will require you to press the Manual Store Button in order to store any data at a duct, hood, vent, or other air system. The meter will not store any data automatically. Be sure to record the location and date/time of storage for reference when reviewing the data. After storing the conditions at each location, simply review the data and balance the system.

Memory Capabilities

Store Rate	Total Memory	Store Rate	Total Memory
2 sec	8 min, 20 sec	10 min	1 day, 17 hr, 40 min
5 sec	20 min, 50 sec	20 min	3 days, 11 hr, 20 min
10 sec	41 min, 40 sec	30 min	5 days, 5 hr
20 sec	1 hr, 13 min, 20 sec	1 hr	1 wk, 3 days, 10 hr
30 sec	2 hr, 5 min	2 hr	2 wk, 1 day, 20 hr
1 min	4 hr, 10 min	5 hr	7 wk, 3 days, 2 hr
2 min	8 hr, 20 min	12 hr	17 wk, 6 days
5 min	20 hr, 50 min		

14

Heat Index: A practical measure of how hot the current combination of *relative humidity* and *temperature* feels to a human body. Higher *relative humidity* makes it seem hotter because our ability to cool ourselves by evaporating perspiration is reduced.

Relative Humidity: The amount of water vapor actually in the air divided by the maximum amount of water vapor the air could hold at that *temperature*, expressed as a percentage.

Station Pressure: The *air pressure* of your location, NOT reduced to the sea level equivalent.

Temperature: The ambient air temperature.

Wet Bulb Temperature: The lowest *temperature* to which a thermometer can be cooled by evaporating water into the air at constant pressure. This measurement is a holdover from the use of an instrument called a sling psychrometer. To measure wet bulb temperature with a sling psychrometer, a thermometer with a wet cloth covering over the bulb is spun rapidly through the air. If the relative humidity is high, there will be little evaporative cooling and the wet bulb temperature will be quite close to the ambient temperature. Some exercise physiology guides use *wet bulb temperature*, rather than *heat index*, as a measure of the safety of exercise in hot and humid conditions.

Wind Chill: The cooling effect of combining wind and temperature. The wind chill gives a more accurate reading of how cold it really feels to the human body. The Kestrel 4000's wind chill is based on the National Weather Service standards as of November 1, 2001.

16

Default Settings

UNIT	METRIC	IMPERIAL
Wind Functions	m/s	mph
Temperature Functions	°C	°F
Barometric Pressure	hPa	inHg
Altitude Functions	m	ft
Time Format	24 hour	12 hour
Date Format	day/month/year	month/day/year

SETTING	FACTORY DEFAULT
Automatic Data Store	On
Data Store Rate	1 hour
Data Overwrite	On
Manual Data Store	On
User Screen 1	wind speed, temperature, humidity
User Screen 2	humidity, dewpoint, wet bulb
User Screen 3	pressure, altitude, density altitdue
Display Contrast	10
Automatic Shutdown	15 minutes
Language	English

17

Specifications

ACCURACY (Within OPERATIONAL RANGE stated below)

Wind Speed	±3% of reading
Temperature	±1°C
Wind Chill	±2°C
Wet Bulb Temp	±2°C
Dewpoint	±3°C (above 20% RH)
Heat Index	±3°C
Relative Humidity	±3%
Pressure	±3hPa
Altitude	±30m (at standard atmospheric conditions)
Altitude Resolution	1m
Density Altitude	±75m

UNITS AND OPERATIONAL RANGE

Units	Low End	High End
Knots	0.6	78
Meters per Second	0.3	40
Kilometers per Hour	1.0	144
Miles per Hour	0.7	89
Feet per Minute	59	7877
Beaufort Force	1	16
Celsius	-29	70
Fahrenheit	-20	158
Percent Humidity	5	95
Meters	-500	9000
Feet	-1500	30000
Hectopascal (or mbar)	870.0	1080.0
Inches Mercury	25.70	31.90

RESPONSE TIME

Wind Speed	1 Second
Temperature, Relative Humidity, Wind Chill, Heat Index, Dewpoint	<1 Minute

DISPLAY

Update	1 second
Temperature Range	Normal operation from -20°C to 60°C [-4°F to 140°F]. Below -20°C [-4°F], accurate readings may be taken by keeping the unit warmer than -20°C [-4°F] and exposing it for the minimum time necessary to take a reading (less than one minute).
Storage Temperature	-30°C to 60°C [-22°F to 140°F].

PHYSICAL

Battery	Two AAA alkaline batteries (included).
Impeller	25 mm. [1 in.] diameter, sapphire bearings, light weight. User-replaceable impeller/housing assembly.
Temperature Sensor	Hermetically sealed precision thermistor.
Humidity Sensor	Capacitive sensor.
Pressure Sensor	Monolithic Silicon Piezoresistive sensor.
Dimensions	12.7 x 4.5 x 2.8 cm. [5 x 1.8 x 1.1 in.]
Weight	102 g. [3.6 oz.]

For more information or more detailed specifications, please visit www.nkhome.com.

18

NK
Nielsen-Kellerman
610.447.1555
www.nkhome.com
info@nkhome.com